



arium® advance RO

Reverse osmosis system with iJust

Advantages

- Time-saving - Use of innovative bag technology, eliminates costly tank cleaning
- Optimized water consumption - Automatic with iJust
- Easy to use - Display with touch function and intuitive menu



Product Description

The arium® advance RO provides Type 3 reverse osmosis water of the highest quality. The innovative iJust automatically optimizes water consumption and ensures the conscientious use of our environmental resources. In contrast to conventional water purification systems, the unique touch display with intuitive menu navigation makes it extremely easy to use.

With a flow rate of up to 8, 16 or 24 l/h, the automatic RO membrane backflush and a constant flow rate, the arium® advance RO is the optimal choice for general laboratory applications.

Applications

- Feed water for ultrapure water systems
- Rinsing of glass and laboratory containers
- Feed water for various laboratory devices, such as humidifiers, autoclaves, and dishwashers

Innovative bag technology

The pure water is stored in the enclosed arium® bagtank system. This guarantees optimal storage of the pure water and protects against secondary contamination. Time-consuming tank cleaning intervals are eliminated thanks to the interchangeable bag.

iJust

iJust stands for innovative technology that optimizes water production. Amongst other things, the intelligent arium® software controls a valve on the concentrate outlet in accordance with the data that have been entered for CaCO_3 and CO_2 . iJust therefore optimizes the product water quality and water consumption.


- The highest product water quality at all times
- Optimized, economical water consumption
- Guarantees a longer life of the downstream ultrapure water systems

Display with touch function

Simply navigate intuitively in the easy-to-use and clear menu by lightly touching the display - even with gloves.

Technical Specifications

Water purification method	Particle filtration, adsorption by means of spherical activated carbon, catalyst, reverse osmosis, optional end-position particle, and sterile filtration
Dimensions: width × height × depth	35.0 × 50.1 × 45.1 cm
Empty weight	approx. 15 kg
Operating weight	approx. 22 kg
Power supply	100 – 240 VAC (± 10 %); 50 – 60 Hz, 130 VA (max.)
Operating temperature	2°C – 35°C at max. 80% relative humidity
Storage temperature	5°C – 45°C at max. 80% relative humidity

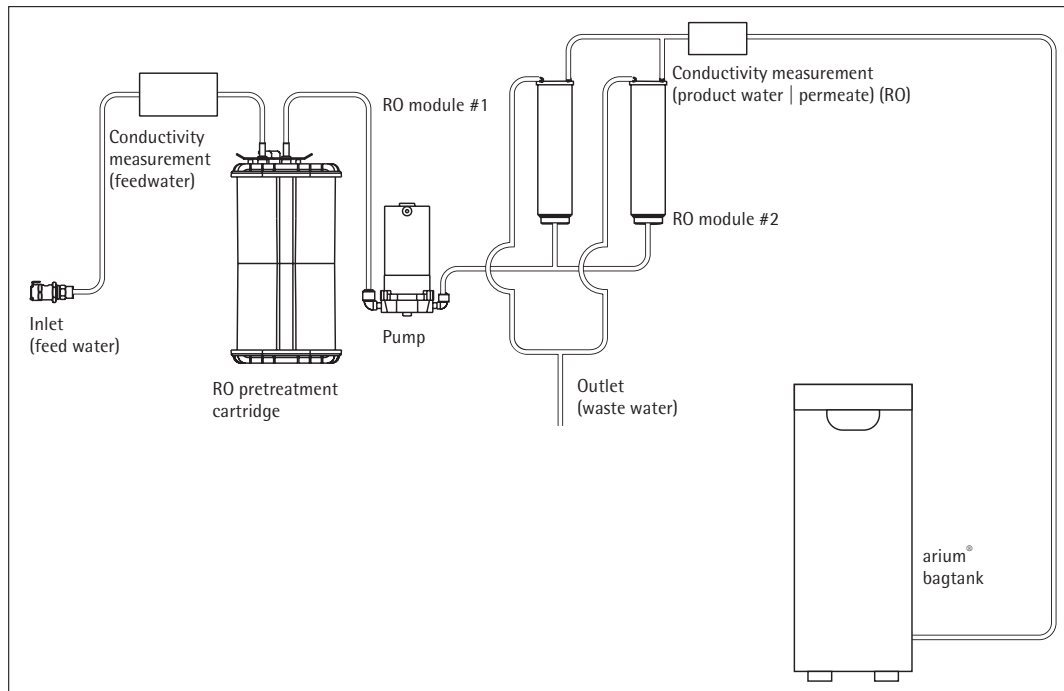

Flow diagram arium® advance RO (H2O-RO-2-T)

Product Water Quality

Water type	Type 3 pure water
Production output ³	8, 16 or 24 l/h
Water dispensing flow rate ⁴	3 l/min
Typical conductivity ¹	< 20 µS/cm
Typical resistivity ¹	< 0.05 MO × cm
Microorganism content ²	< 1 CFU/1,000 ml
Particle content ²	< 1/ml
Typical ion retention	up to 98%
Retention of dissolved organic substances (MW > 300 Dalton)	> 99%
Particle and microorganism retention	> 99%

Feed Water Quality

Exclusively potable tap water pursuant to the drinking water standards of the USA, the European Union, or Japan.

Input pressure	0.5 – 6.9 bar, recommended > 2 bar
Temperature	2 – 30°C
Specific conductivity	< 1,500 µS/cm compensated to 25°C
TOC	< 2,000 ppb
Max. total hardness (max. CaCO ₃)	360 ppm
Free chlorine	< 4 ppm
Iron (total Fe content)	< 0.1 ppm
Fouling Index (SDI)	< 5
Turbidity	<1 NTU
pH value	4 – 10

¹ Depending on the feed water quality and temperature

² When using an arium® sterile filter (Sartopore® 2 150)

³ Depending on the feed water pressure, temperature, and condition of the RO modules

⁴ Depending on the arium® bagtank design, hydrostatic pressure, and connected accessories or end filter

Ordering Information

arium® advance RO reverse osmosis systems for the production of Type 3 pure water

Scope of supply: 1 arium® advance H2O-RO, RO-(reverse osmosis) module(s) and connection kit

Order no.	Description
H2O-RO-1-T	arium® advance EDI table device in a compact design for every laboratory bench, flow capacity 8 l/h
H2O-RO-1-B	arium® advance RO wall-mounted device, space-saving with integrated wall bracket, flow capacity 8 l/h
H2O-RO-2-T	arium® advance RO benchtop device in a compact design for every laboratory bench, flow capacity 16 l/h
H2O-RO-2-B	arium® advance RO wall-mounted device, space-saving with integrated wall bracket, flow capacity 16 l/h
H2O-RO-3-T	arium® advance RO benchtop device in a compact design for every laboratory bench, flow capacity 24 l/h
H2O-RO-3-B	arium® advance RO wall-mounted device, space-saving with integrated wall bracket, flow capacity 24 l/h

Accessories

arium® bagtanks

The most innovative tank system

- Integrated ventilation filter with non-return valve provides reliable protection against CO₂ pollution
- High flexibility through the 4 rollers available as an option
- Easy and fast exchange of the arium® bags
- High user safety due to the avoidance of cleaning chemicals



Description

The pure water is stored in the innovative enclosed arium® bagtank system. This system protects the prepared pure water against secondary contamination. The Sartorius bagtank system enables consistent water quality over a prolonged period, thereby ensuring permanent, reproducible results. Unlike conventional water reservoirs, the arium® bag offers a high level of user safety and time savings, as there is no need for a complicated cleaning procedure with chemicals.

arium® bagtanks are housings which are equipped with arium® bags. The arium® bagtanks are available in 20 l, 50 l, and 100 l volumes. Their design is adaptable and saves space in any laboratory environment, and the optional rollers make this an extremely flexible system.

Integrated distributor pumps are a standard component of the 50 l and 100 l bagtanks. A distributor pump is also available as an option for the 20 l bagtank. In addition, a wall holder for the space-saving and user-friendly installation of this tank is also available.

Water dispensing flow rate

With pump ¹	up to 3.0 l/min
With pump, remote dispenser and sterile filter ¹	up to 2.0 l/min
without pump ²	up to 1.5 l/min

Intended Use

Device type:
arium® comfort I and comfort II,
arium® advance RO and advance EDI

Technical Specifications | Ordering Information

Materials	
bagtank	Stainless steel plastic
bag	S71 film
Tubing	PE silicone

Dimensions, excluding rollers and wall bracket [H×W×D]	
bagtank 20	80.8 × 16.6 × 43.7 cm
bagtank 50	85.2 × 25.4 × 58.7 cm
bagtank 100	85.2 × 51.4 × 58.7 cm
bag 20 l	86.5 × 43.0 cm
bag 50 l	90.0 × 58.1 cm

Empty weight without arium® bag Operating weight with filled arium® bag	
bagtank 20	19 kg 40 kg
bagtank 50	33 kg 84 kg
bagtank 100	47 kg 148 kg

Number of bags per tank	
bagtank 20	1 × 20 liters
bagtank 50	1 × 50 liters
bagtank 100	2 × 50 liters
Power supply ¹	240 VAC (± 10%), 50 Hz, 120 VA (max.)
Power supply US versions ¹	115 VAC (± 10%), 60 Hz, 170 VA (max.)
Operating temperature	2°C – -35°C at max. 80% relative humidity
Storage temperature	5°C – 45°C at max. 80% relative humidity

Water connection input	
	1 × 3/8" PLC quick-connect coupling

Water connection output	
bagtank 20	1 × 3/8" PLC quick-connect coupling
bagtank 50, bagtank 100	2 × 3/8" PLC quick-connect coupling

¹ bagtank 20 is supplied without a pump as standard, pump optionally available

² Value only applies to bagtank 20, dispensing site at the same height or lower than the tank outlet

³ Note: The arium® bag is not included in the scope of delivery of the arium® bagtank

Order number	Description
H20-AOV-20 ³	arium® bagtank 20 l, without pump, (1 pc)
H20-AOV-50 ³	arium® bagtank 50 l, with pump 240 VAC, 50 Hz, (1 pc)
H20-AOV-50-US ³	arium® bagtank 50 l, with pump 115 VAC, 60 Hz, (1 pc)
H20-AOV-50-W ³	arium® bagtank 50 l, without pump, (1 pc)
H20-AOV-100 ³	arium® bagtank 100 l, with pump 240 VAC, 50 Hz, (1 pc)
H20-AOV-100-US ³	arium® bagtank 100 l, with pump 115 VAC, 60 Hz, (1 pc)
H20-AOV-100-W ³	arium® bagtank 100 l, without pump, (1 pc)
H20-ADP-20	Pump arium® bagtank 20 l, 240 VAC, 50 Hz, (1 pc)
H20-ADP-20-US	Pump arium® bagtank 20 l, 115 VAC, 60 Hz, (1 pc)
H20-ATR	Rollers for arium® bagtank 50 l & bagtank 100, including fastening material, (4 pcs)
H20-CBS-20	arium® 20 l bag for arium® 20 l bagtank, (2 pcs)
H20-CBS-50	arium® 50 l bag for arium® 50 l and 100 l bagtank, (2 pcs)
H20-ATB	Wall mount for arium® bagtank 20, (1 pc)

arium® bagtank Remote Dispenser

Ergonomic water dispensing with a working radius of up to 3.7 m

- Extended operating range of 3.7 m
- Available with height-adjustable stand or wall mounting bracket
- Ergonomic design
- Easy-to-use
- Sterile filter can be connected

Description

The arium® remote dispenser is an ergonomically designed, easy-to-handle dosing unit which is ideally suited to the withdrawal of pure water.

Depending on the working environment, you can save space by mounting the remote dispenser on the wall or on a stand that is height-adjustable up to 70 cm. Moreover, the stand lets you work in a relaxed position one-handedly and allows optimal adjustment to different sized extraction vessels. The extended tube routing provides an operating range of 2.5 m from the arium® back tank and a further 1.2 m from the stand.

To guarantee sterile and particle-free water removal, a Sartopore® 2 150 Capsule sterile filter with a 0.2 µm pore size can be easily connected.



Technical Specifications | Ordering Information

Materials	
Stand	Aluminum (gray anodized)
Remote dispenser	Plastic, white finish
Tubing	PE

Dimensions without tubing [W × H × D]	
Remote dispenser with stand	18.5 × 59.5 × 51.0 cm
Remote dispenser with wall mounting bracket	9.0 × 10.0 × 28.5 cm

Weight without tubing	
Remote dispenser with stand	5.60 kg
Remote dispenser with wall mounting bracket	0.46 kg

Order number	Description
613-AMDG1	arium® remote dispenser including height-adjustable stand for connection to arium® bagtanks, (1 pc)
613-AMDG2	arium® remote dispenser including wall mounting kit for connection to arium® bagtanks, (1 pc)

Intended Use for arium bagtanks:

arium® bagtank 20*
arium® bagtank 50
arium® bagtank 100

arium® pressure tank 30
arium® pressure tank 50
arium® pressure tank 70
arium® pressure tank 100

* only in conjunction with an optional distributor pump

arium® Water Guard

Early detection of leakages protects the laboratory

- Highly sensitive optical sensor
- Audiovisual alarm signals
- Automatic water stop in the case of leakage
- High-quality material, no corrosion
- Easy to install
- Integrated wall mounting bracket for solenoid valve



Description

Only the early detection of water leakages provides optimal protection against water damage in the laboratory. Leakages are registered by the highly sensitive optical sensor.

In contrast to conventional sensors, this sensor functions independently of conductivity measurement values, as these are so low in the pure and ultrapure water range that the activation of the guard is not guaranteed. Once a leak is detected, the water guard automatically locks the feed water inlet line. An acoustic warning is triggered immediately and the system status can be constantly controlled using the integrated LED display. With its sensitive optical sensors and high-quality materials, the arium® water guard is perfect for all ultrapure and pure water systems.

Technical Specifications | Ordering Information

Sensor dimensions

Diameter	5 cm
Height	2.5 cm
Cable length	2 m

Tubing connections

Input	3/8" Plug-in connector
Output	3/8" Plug-in connector
Power supply	100 – 240 VAC 50 – 60 Hz

Order number

610AWG1

Description

arium® water guard, (1 pc)

Intended Use

Device type:

arium® comfort I and comfort II
arium® pro, pro DI, pro UF, pro UV and pro VF
arium® advance RO and EDI
arium® 611, 612 and 613

arium® Sterile Filter

Sterile and particle-free water dispensing

- Excellent service life and flow rates
- Integrity tested
- Validated according to HIMA and ASTM F-838-05
- Meets WFI quality standards pursuant to USP incl. USP plastic class VI test
- Production in accordance with DIN ISO 9001
- Easy to install
- Automatic venting
- Certified quality



Description

The arium® sterile filter (Sartopore® 2 150) is a sterile, ready-to-use membrane filter capsule suitable for the most stringent requirements. Sartopore® 2 150 membrane filter capsules contain a hydrophilic, heterogeneous polyethersulfone double membrane. It enables an excellent service life and flow rates. The capsule is attached in the end position by means of a quick connector and reliably removes all particles and microorganisms in the last quarter purification step. A hydrophobic PTFE membrane at the farthest point "upstream" allows for easy and clean ventilation of the capsule.

All pleated Sartopore® 2 membrane filter units are validated as sterile filters for biopharmaceutical application according to the HIMA and ASTM F-838-05 guidelines (documentation available). During the manufacturing process, every capsule is integrity-tested to meet the highest quality standards and safety regulations.

Technical Specifications | Ordering Information

Materials	
Membranes	Asym. Polyethersulfone
Bell assembly	Polycarbonate
Other plastics	Polypropylene
Pore size	0.45 µm + 0.2 µm
Filtration area	0.015 m ²
Input and Output	1/4" Plug-in connector
Sterilization (max. 3 cycles)	Autoclaving at 134°C, 1 bar, 30 min.
Max. diffusion	1 ml/min @ 2.5 bar
Min. bubble point	3.2 bar

Order number	Description
5441307H4--CE--B	arium® sterile filter (Sartopore® 2 150 Capsule), 0.2 µm pore size, (5 pcs)

Intended Use

On remote dispenser and display extraction unit for device type:
arium® comfort I and comfort II
arium® pro, pro DI, pro UF, pro UV and pro VF
arium® 611
arium® bagtank remote dispenser
arium® remote dispenser

arium® RO Pretreatment Cartridge

Safe protection of the RO module

- Fast and effective adsorption of impurities through high-grade activated carbon
- 5 µm depth filter for the retention of particles
- Highly efficient catalyst for removing free chlorine
- Patented cartridge design for easy installation

Description

The best protection for a downstream reverse osmosis (RO) membrane is the combination of spherical, catalytic effective activated carbon, a catalyst, and a depth filter. It reliably removes oxidation agents, such as free chlorine, heavy-metal ions and particulate contaminants from the feed water of the system.

A special catalyst is an integral part of pre-treatment. It is particularly efficient at removing free chlorine and at a lower temperature and/or higher pH value compared to activated carbon alone.

In addition to preventing deposits from forming, the catalyst diminishes fouling processes and inhibits microbiological growth. The patented cartridge design ensures minimal time expenditure with ultra-easy installation and exchange.



Technical Specifications | Ordering Information

Materials	
Housing	High-quality polypropylene
Cleaning media	Spherical catalytic effective activated carbon plus polypropylene filter cartridge with nom. 5 µm separation rate
Dimensions [W×H×D]	18 × 26 × 11 cm
Operating weight	3.5 kg
Feed water requirements	See "Technical Specifications" page 2

Order number	Description
613CPF05-----V	arium® RO pretreatment cartridge, (2 pcs)

Intended Use

Device type:
arium® advance RO and advance EDI
61316, 61215

arium® RO modules

Reverse osmosis modules with low-energy membranes

- Highly efficient reverse osmosis membranes, optimized water consumption
- Low-energy membranes for ecological and economical operation
- Backflush with product water increases the service life
- Easy replacement
- Constant flow
- Consistently high water quality



Description

The arium® RO modules consist of two independent membranes whose design guarantees easy installation and reliable operation. Each of the two modules contains a low-energy reverse osmosis membrane in a polypropylene housing.

The housing has connections for feed water, permeate (product water) and concentrate (discarded water). The RO modules enable an ideal water yield, thereby optimizing the water consumption. At the same time, the salts are typically retained to a high level of 98%. Thanks to the backflush with permeate, particles and salts are removed from the surface of the membrane.

This results in a longer service life and lower system maintenance costs. In addition, this backflush function on restarting the system after a standstill allows for the immediate dispensing of high quality water.

Technical Specifications | Ordering Information

Materials	
RO membranes	Low-energy membrane made of polyamide
Housing	
	Polypropylene
Dimensions for each module	
Height	30.8 cm
Diameter	7.8 cm
Weight	0.468 kg
Product Water Quality	See "Technical Specifications" page 2

Order number	Description
613CPM4	arium® RO module, (1 pc)
613CPM4-----V	arium® RO module, (2 pcs)

Intended Use

Device type:
arium® comfort I
arium® advance RO
arium® 61316 and 61215

arium® Cleaning Set RO Module

Maximum service life of the RO module

- Effective removal of scaling and metal deposits
- Elimination of organic compounds
- Dispersion of colloids
- Stable pH values
- Gentle on materials



Description

Two-stage cleaning kit for removing scaling and organic contaminants.

The alkaline substance contains non-foaming surfactants that dissolve organic compounds, disperse colloids and can be quickly removed again from the membrane surface. Cleaning efficiency depends on the pH value that is steadily maintained by buffer substances through a large temperature range.

The acidic cleaning agent to remove scaling contains chelate and reducing agents in order to dissolve metallic deposits. The ideal pH value also remains consistently low over a wide range during cleaning in this case thanks to the buffers.

Technical Specifications | Ordering Information

Ingredients	
Alkaline cleaner	HEDTA, ethanolamine, triethanolamine
Acidic cleaner	HEDTA, phosphoric acid, citric acid

Order number	Description
H2O-CCS	arium® cleaning kit RO module, (1 pc)

Intended Use

Device type:
arium® comfort I and comfort II
arium® advance RO and advance EDI
arium® 612 and 613

Sales and Service Contacts

For further contacts, visit www.sartorius.com

Europe

Germany

Sartorius Lab Instruments
GmbH & Co. KG
Weender Landstrasse 94-108
37075 Goettingen

Phone +49.551.308.0
Fax +49.551.308.3289

France & Suisse Romande

Sartorius France
2, rue Antoine Laurent de Lavoisier
ZA de la Gaudrée
91410 Dourdan

Phone +33.1.70.62.50.00
Fax +33.1.64.59.76.39

Austria

Sartorius Austria GmbH
Modecenterstrasse 22
1030 Vienna

Phone +43.1.7965760.0
Fax +43.1.7965760.24

Belgium

Sartorius Belgium N.V.
Rue Colonel Bourg 105
1030 Bruxelles

Phone +32.2.756.06.90
Fax +32.2.481.84.11

Finland & Baltics

Sartorius Biohit Liquid Handling Oy
Laippatie 1
00880 Helsinki

Phone +358.9.755.951
Fax +358.9.755.95.200

Hungary

Sartorius Hungária Kft.
Kagyló u. 5.
2092 Budakeszi

Phone +3623.457.227
Fax +3623.457.147

Ireland

Sartorius Ireland Ltd.
Unit 41, The Business Centre
Stadium Business Park
Ballycoolin Road
Dublin 11

Phone +353.1.8089050
Fax +353.1.8089388

Italy

Sartorius Italy S.r.l.
Viale A. Casati, 4
20835 Muggiò (MB)

Phone +39.039.4659.1
Fax +39.039.4659.88

Netherlands

Sartorius Netherlands B.V.

Phone +31.30.60.53.001
Fax +31.30.60.52.917

info.netherlands@sartorius.com

Poland

Sartorius Poland sp.z o.o.
ul. Wrzesinska 70
62-025 Kostrzyn

Phone +48.61.6473830
Fax +48.61.6473839

Russian Federation

LLC "Sartorius ICR" and LLC "Biohit"
Uralskaya str. 4, Lit. B
199155, Saint-Petersburg

Phone +7.812.327.5.327
Fax +7.812.327.5.323

Spain & Portugal

Sartorius Spain, S.A.
Avda. de la Industria, 32
Edificio PAYMA
28108 Alcobendas (Madrid)

Phone Spain +34.902.123.367
Phone Portugal +351.800.855.800
Fax Spain +34.91.358.96.23
Fax Portugal +351.800.855.799

Switzerland

Sartorius Mechatronics Switzerland AG
Ringstrasse 24a
8317 Tagelswangen (ZH)

Phone +41.44.746.50.00
Fax +41.44.746.50.50

U.K.

Sartorius UK Ltd.
Longmead Business Centre
Blenheim Road, Epsom
Surrey KT19 9QQ

Phone +44.1372.737159
Fax +44.1372.726171

Ukraine

LLC "Biohit"
Post Box 440 "B"
01001 Kiev, Ukraine

Phone +380.44.411.4918
Fax +380.50.623.3162

Americas

USA

Sartorius Corporation
5 Orville Drive, Suite 200
Bohemia, NY 11716

Phone +1.631.254.4249
Toll-free +1.800.635.2906
Fax +1.631.254.4253

Argentina

Sartorius Argentina S.A.
Int. A. Avalos 4251
B1605ECS Munro
Buenos Aires

Phone +54.11.4721.0505
Fax +54.11.4762.2333

Brazil

Sartorius do Brasil Ltda
Avenida Senador Vergueiro 2962
São Bernardo do Campo
CEP 09600-000 - SP- Brasil

Phone +55.11.4362.8900
Fax +55.11.4362.8901

Canada

Sartorius Canada Inc.
2179 Dunwin Drive #4
Mississauga, ON L5L 1X2

Phone +1.905.569.7977
Toll-Free +1.800.668.4234
Fax +1.905.569.7021

Mexico

Sartorius de México S.A. de C.V.
Circuito Circunvalación Poniente
No. 149
Ciudad Satélite
53100, Estado de México
México

Phone +52.5555.62.1102
Fax +52.5555.62.2942

Asia | Pacific

Australia

Sartorius Australia Pty. Ltd.
Unit 5, 7-11 Rodeo Drive
Dandenong South Vic 3175

Phone +61.3.8762.1800
Fax +61.3.8762.1828

China

Sartorius Scientific
Instruments (Beijing) Co., Ltd.
33 Yu An Road, Airport Industrial Park
Zone B,
Shunyi District, Beijing 101300,
P.R.China

Phone +86.10.8042.6300
Fax +86.10.8042.6486

Hong Kong

Sartorius Hong Kong Ltd.
Unit 1012, Lu Plaza
2 Wing Yip Street
Kwun Tong
Kowloon, Hong Kong

Phone +852.2774.2678
Fax +852.2766.3526

India

Sartorius Weighing India Pvt. Ltd.
#69/2-69/3, NH 48, Jakkasandra,
Nelamangala Tq
562 123 Bangalore, India

Phone +91.80.4350.5250
Fax +91.80.4350.5253

Japan

Sartorius Japan K.K.
4th Fl., Daiwa Shinagawa North Bldg.
8-11, Kita-Shinagawa 1-chome
Shinagawa-ku, Tokyo, 140-0001 Japan

Phone +81.3.3740.5408
Fax +81.3.3740.5406

Malaysia

Sartorius Malaysia Sdn. Bhd
Lot L3-E-3B, Enterprise 4
Technology Park Malaysia
Bukit Jalil
57000 Kuala Lumpur, Malaysia

Phone +60.3.8996.0622
Fax +60.3.8996.0755

Singapore

Sartorius Singapore Pte. Ltd
1 Science Park Road,
The Capricorn, #05-08A,
Singapore Science Park II
Singapore 117528

Phone +65.6872.3966
Fax +65.6778.2494

South Korea

Sartorius Korea Ltd.
8th Floor, Solid Space B/D,
PanGyoYeok-Ro 220, Bundang-Gu
SeongNam-Si, GyeongGi-Do, 463-400

Phone +82.31.622.5700
Fax +82.31.622.5799

Thailand

Sartorius (Thailand) Co. Ltd.
129 Rama 9 Road,
Huaykwang
Bangkok 10310

Phone +66.2643.8361-6
Fax +66.2643.8367



◀ www.sartorius.com